



POWERPLUS
POWERPLUS GROUP INC., USA



PNEUMATIC TIRE ROLLER


PNEUMATIC TIRE ROLLER



- Versatile Compaction Performance



- Ergonomically designed cabin for extensive operations with well deserved comfort (CPT288H-III)

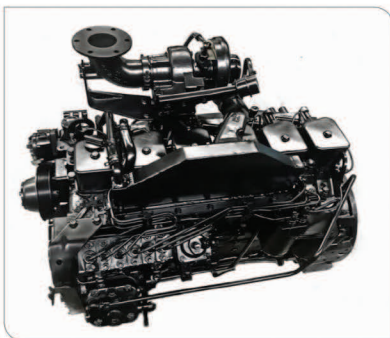

- POWERPLUS engine to maximize performance



- Modern scrapers keep the tyres clean



- Dedicated spray nozzles for tire

MODEL		CPT238H-III	CPT288H-III
Operating Weight (Without Ballast)	kg	10000	20000
Operating Weight (With Ballast)	kg	16000	30000
Length	mm	4780	4950
Width	mm	2100	2750
Height	mm	3200	3240
Minimum Turning Radius	mm	7500	8000
Compaction Width	mm	2280	2790
Wheelbase	mm	3500	3800
Gradeability	%	30	30
POWERPLUS ENGINE			
Type		4 Cylinder 4 stroke water cooled	6 Cylinder 4 stroke water cooled
Rated Power	HP	100	170
Rated Speed	rpm	2200	2200
Displacement	L	4.7	5.5
Electric System	V	24	24
SERVICE REFILL CAPACITY			
Fuel (diesel)	L	180	193
Engine Oil	L	18	22
Hydraulic	L	68	99
Water Tank for F/R Spray	L	300	500
TRANSMISSION SYSTEM			
Type		Hydraulic	Hydraulic
Maximum Travelling Speed	km/h	10	10
Brake		Hydraulic	Hydraulic
STEERING & TIRE			
Number of Front Tire		4	5
Number of Rear Tire		5	6
Tire Size		10.00-20	
Steering		Hydraulic	

International Division

POWERPLUS GROUP PTE. LTD.

Powerplus Building
39 Ubi Crescent, Singapore 408587
Tel: (65) 63399333
Fax: (65) 63399933

Research & Development Facility

POWERPLUS GROUP INC., U.S.A.

1521 East Grand Avenue,
California 91766, USA
Tel: (1) 909 6225 888
Fax: (1) 909 6225 828

Distributed By:

 **POWERPLUS** is the registered TM of  **POWERPLUS GROUP INC., USA**
in the United States of America & Worldwide

All rights of manufacturer and of this book reserved. Unauthorized duplication is a violation of application law.